

# EnviroSump™ Filtration Unit




The Ausdrain EnviroSump™ has been developed as a low cost, effective and easy to maintain stormwater filtration system. EnviroSump™ traps sediment and gross pollutants allowing clean water to flow through the filter. EnviroSump™ is suitable for residential and smaller size projects and is non-trafficable recommended for installation in landscaped areas only.

## TECHNICAL DATA


<b>Dimensions (Metric):</b>	(H) 700mm x (L) 600mm x (W) 600mm
<b>Dimensions (Imperial):</b>	(H) 27.56" x (L) 23.62" x (W) 23.62"
<b>Riser (Metric):</b>	(H) 300mm x (L) 600mm x (W) 600mm
<b>Riser (Imperial):</b>	(H) 11.81" x (L) 23.62" x (W) 23.62"
<b>Storage capacity:</b>	250 litres (66 US gallons)
<b>Filter bag flow rate:</b>	20 litres/sec (5.3 US gallons)
<b>Material:</b>	UV stabilised polyethylene



EnviroSump™ Filtration Unit

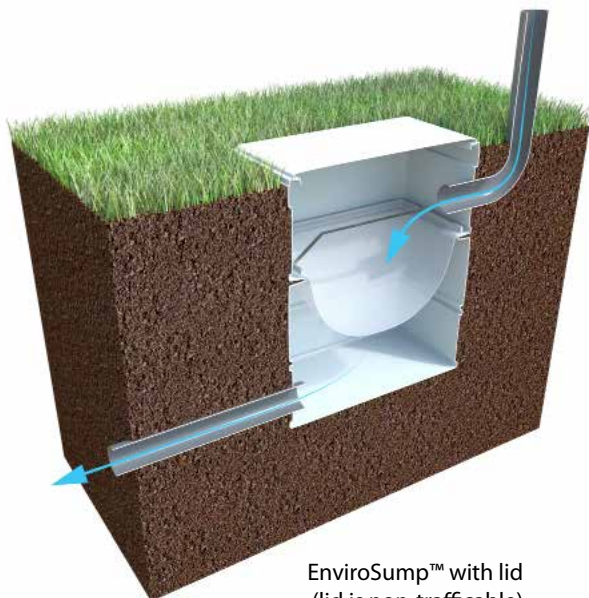

EnviroSump™ with lid  
(lid is non-trafficable)

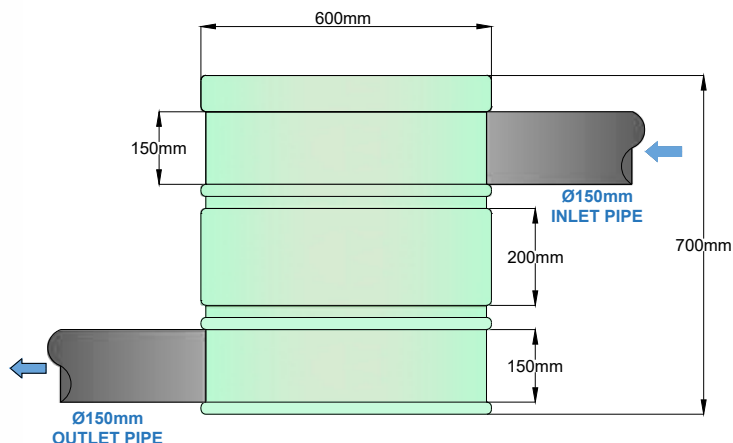

### DISCLAIMER:

All reasonable care has been taken in compiling the information in this brochure. The details in this brochure are intended only as a guide in specifying and installing.

Ausdrain™ products. It is the customers responsibility to ensure that each product is suitable for its intended purpose and that the actual conditions of use are suitable. AUSDRAIN™ assumes no responsibility for the specification and/or installation of its products or for improper reliance upon or misuse of the data herein. Due to continuous product development AUSDRAIN™ reserves the right to change product design and/or specifications without notice.

Australian Drainage Modules Pty Ltd trading as AUSDRAIN™