

# 5 Brace EnviroModule™



## HEAVY DUTY



A practical and cost effective solution for underground water storage requirements, the Ausdrain 5 Brace Heavy Duty EnviroModule™ is ideal for residential and commercial rainwater harvesting tanks, filtration tanks, infiltration tanks and onsite detention tanks. The 5 Brace Heavy Duty EnviroModule™ can also be used in bioswales to manage stormwater runoff or as a lightweight and environmentally sustainable structural void fill solution.

### TECHNICAL DATA

<b>Dimensions (Metric):</b>	(H) 450mm x (L) 600mm x (W) 400mm
<b>Dimensions (Imperial):</b>	(H) 17.71" x (L) 23.62" x (W) 15.74"
<b>Gross volume:</b>	108 litres (28.5 US gallons)
<b>Nominal capacity:</b>	105 litres (27.73 US gallons)*
<b>Flow rate: (per module)</b>	7.12 - 47.54L/sec (1.88 - 12.56 US gallons/sec)**
<b>Void volume:</b>	95%
<b>Compressive strength:</b>	24.30t/m <sup>2</sup> (35.12 PSI)
<b>Service temperature:</b>	-30°C + 120°C (-22°F + 248°F)
<b>Material:</b>	Available in Reprolene™ (Recycled Polypropylene)
<b>Chemical properties:</b>	Unaffected by moulds and algae, soil-borne chemicals and bacteria

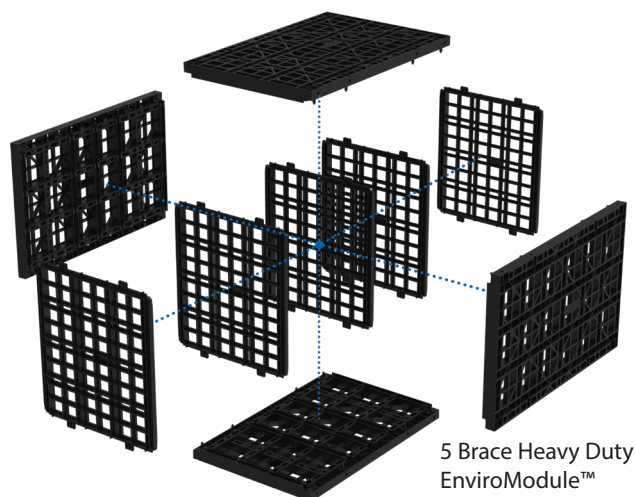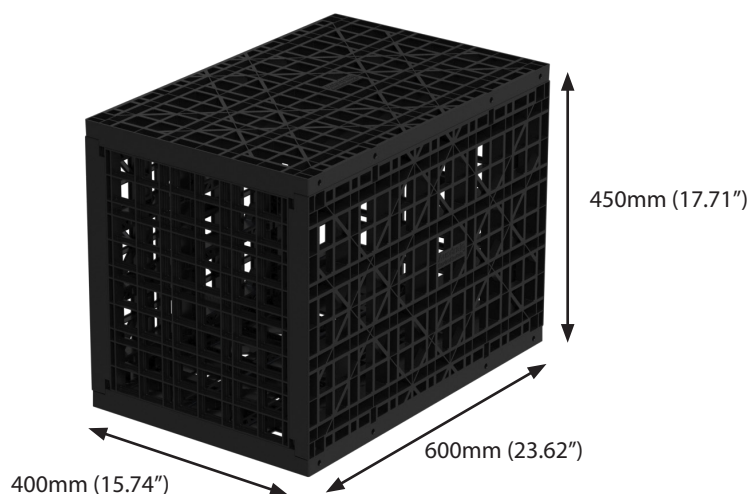

#### DISCLAIMER:

\* Subject to brace configuration. \*\* Subject of gradient and free surface height

All reasonable care has been taken in compiling the information in this brochure. The details in this brochure are intended only as a guide in specifying and installing.

Ausdrain™ products. It is the customers responsibility to ensure that each product is suitable for its intended purpose and that the actual conditions of use are suitable. AUSDRAIN™ assumes no responsibility for the specification and/or installation of its products or for improper reliance upon or misuse of the data herein. Due to continuous product development AUSDRAIN™ reserves the right to change product design and/or specifications without notice.

Australian Drainage Modules Pty Ltd trading as AUSDRAIN™